

## Stack Dryer Advantages

### • Reverse Rotation

Single dryer and Stack dryer all have reverse rotary function as standard configuration.

### • Convenient Load & Unload

Large diameter loading door is equipped with 180° door opening angle.

### • Famous Spare Parts

Imported gas valve and gas controller are from USA. White roger and Fenwal brand.

### • Consumption Saving

Energy saving. Unique design of small tube (Gas heater) compares with similar products saving 30% gas consumption.

### • Payment Option

QR code payment / card supported payment / coin / token / remote control system.

### • Delta Inverter

Simple Clean series dryer all equipped with Delta inverter as well.

### • Safety Device

Triple inner drum safety protect sensor to ensure the machines in well condition to operate. If any emergency happens, the inner drum will automatic stop running and heating.

### • Touch Screen

4.3 or 5 inch touch screen and button control as two options.

### • OEM and ODM


As factory, we can do OEM and ODM, and customize LOGO for clients.



Hot And Cold Air Exchange



Stable Performance

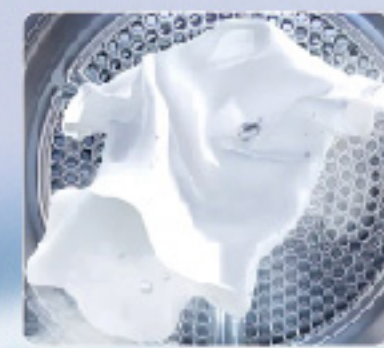

Drying Fast

## Stack Dryer

Available capacity : 12kg/16kg/19kg/22kg/27kg

Warranty: 24 month

**SIMPLECLEAN**

Model	EC/12DD	EC/16DD	EC/19DD	EC/22DD	EC/27DD
-------	---------	---------	---------	---------	---------



### Drum

Loading capacity (lbs-kg)	26lbs (12kg)	35lbs (16kg)	42lbs (19kg)	48.4lbs (22kg)	59.4lbs (27kg)
Volume (L)	229*2	286*2	358*2	379*2	477*2
Diameter (mm)	745	745	745	855	855
Depth (mm)	525	655	820	660	830

### Power

Main motor (kw)	0.25*2	0.25*2	0.25*2	0.55*2	0.55*2
Fan motor (kw)	0.37*2	0.37*2	0.37*2	0.75*2	0.75*2
Heating (kw) electric heated	10.5*2	10.5*2	13.5*2	13.5*2	19.8*2

### Energy consumption

Gas consumption (kg/H)	0.6*2	0.8*2	0.9*2	1*2	1.3*2
CFM (Btu/H)	55000*2	75000*2	90000*2	95000*2	115000*2
Air flow	800*2	800*2	900*2	1000*2	1000*2

### Connection

Gas Inlet (inch)	1/2	1/2	1/2	1/2	1/2
Exhaust pipe (mm)	190*2	190*2	190*2	190*2	190*2

### Net dimensions

L*W*H (mm)	800*1044*2005	800*1174*2005	800*1339*2005	910*1180*2255	910*1350*2255
Net weight (kg)	278	317	340	356	395

### Plywood box dimensions

L*W*H (mm)	950*1194*2155	950*1324*2155	950*1489*2155	1060*1330*2375	1060*1500*2375
Gross weight (kg)	308	347	370	386	425

### Heating way

Electricity, Gas

### Usage way

Coin or OPL